


Products /  **CASTALDI** / BLOCK D08 / D08 BLOCK / D08/LWN-GR

BLOCK D08 D08/LWN-GR

TECHNICAL DATA

GENERAL



Item code	D08/LWN-GR
Place installation	outdoor
Name	D08 BLOCK / D08/LWN-GR wall recessed, wall mounted
Standard colour	GR - graphite satin finish (similar to RAL 7022)
Variante colour	AL - aluminium grey (similar to RAL 7040)
Environments	urban landscape, façades and architectural works, hallway, industrial areas




PHYSICAL

Installation type	wall recessed, wall mounted
Mounting type	surface, with rough-in housing
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Seals	Silicone Rubber.
Body	Corrosion resistant die-cast aluminium body.




DIMENSIONS

A: Total width device (mm)	280
H: Total height device (mm)	150



OPTICAL SYSTEMS

Opening beam	diffused
Optical System	Safety tempered protective glass, with light diffusing texture.
Reflectors	Extra-pure aluminium reflector.



ENERGY SAVING

This luminaire contains built-in LED lamps
The lamps cannot be changed in the luminaire





SOURCES

Source Type	Source Power	System Power	Source	Lamp Socket	Sources Temperature Colour	Nominal Flux	Output Flux	Source description
LED	-	7W	-	-	4000K CRI>80	-	370 lm	-

ELECTRICAL

Ballast type	Electronic
Mounting ballast type	Integral
Line input	Use only (EN 60598-1) a three core H07RN-F rubber cable with diameter between 7,5 and 12mm.
Voltage	220-240V
Frequency	50-60Hz

PHOTOMETRICS

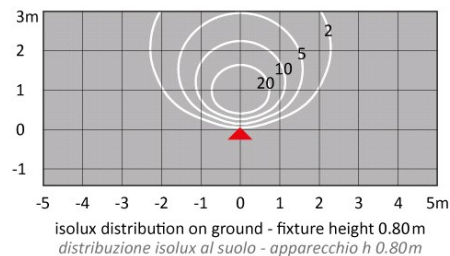

NORMS / DIRECTIVES

Norms	EN 60598-1, EN 60598-2-1
Directives	2014/35/UE, 2014/30/UE

ACCESSORIES

OPTIONAL ACCESSORIES

Optical

Accessory code	D08/GD-GR
Technical description	Directional anti-glaring grid. Directional grid louver trim with parallel shielding fins in sturdy die-cast light alloy -GR GRAPHITE. Provides anti-glare and mechanical protection against shocks and vandalism.



Rough-in housing

Accessory code	D08/CI
Technical description	Rough-in housing for flush mounting. The recessed mounting of block model makes necessary (and very useful) to use a proper box fitted into the masonry itself. This in order to avoid electro-chemical corrosion due to the direct contact metal/concrete, to allow the proper entry and connection of the feeding wires and the easy drawing out of the fixture in case of maintenance.



A: Total width device (mm)	145
Built-in depth (mm)	75

