





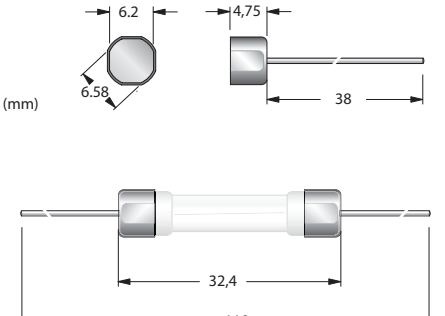









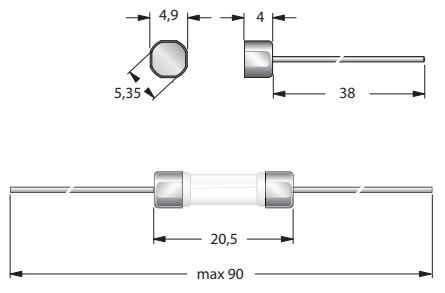





ACCESSORI PER FUSIBILI

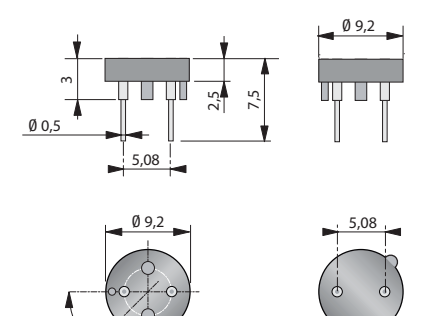Accessories for fuses | Accessoires pour fusibles

| | | | | |
|---|---|--|---|---|
| C6005.08  | Capsula per fusibili 5x20 C6005.08 8 A 250 V Diametro terminale 0,65 mm Terminali Rame stagnato Capsula Ottone nichelato | Push-on cap for 5x20 fuses C6005.08 8 A 250 V Lead diameter 0,65 mm Terminals Tinned copper Cap Nichel plated brass | Embouts pour fusibles 5x20 C6005.08 8 A 250 V Diamètre fils 0,65 mm Fils de connexion Cuivre étamé Embout Laiton nickelé |  |
|  | |  2000 pz 2000 pcs 2000 pces | |  a richiesta si possono fornire montate they can be provided mounted on fuses upon request sur demande on peut les fournir assemblés |

| | | | | |
|--|---|--|---|---|
| C6006.10  | Capsula per fusibili 6,3x32 C6006.10 10 A 250 V Diametro terminale 0,8 mm Terminali Rame stagnato Capsula Ottone nichelato | Push-on cap for 6,3x32 fuses C6006.10 10 A 250 V Lead diameter 0,8 mm Terminals Tinned copper Cap Nichel plated brass | Embouts pour fusibles 6,3x32 C6006.10 10 A 250 V Diamètre fils 0,8 mm Fils de connexion Cuivre étamé Embout Laiton nickelé |  |
|  | |  2000 pz 2000 pcs 2000 pces | |  a richiesta si possono fornire montate they can be provided mounted on fuses upon request sur demande on peut les fournir assemblés |
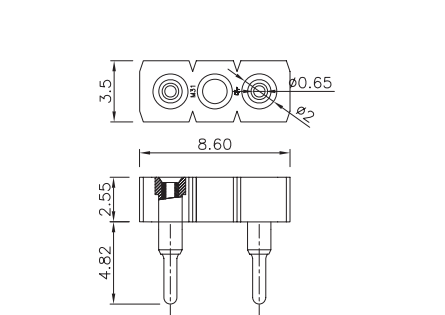
| | | | | |
|--|---|---|---|---|
| C7850  | Porta-microfusibile MT/MF da C.S. Corrente 6,3 A Tensione 250 V Passo 5,08 mm Contatti Ottone nichelato Corpo Stanyl PA46 UL94-V0 Colore Nero | Holder for microfuses MT/MF Current 6,3 A Voltage 250 V Pin distance 5,08 mm Contacts Nichel plated brass Body Stanyl PA46 UL94-V0 Colour Black | Porte micro fusibile MT/MF pour C.I. Courant 6,3 A Tension 250 V Pas 5,08 mm Contacts Laiton nickelé Corps Stanyl PA46 UL94-V0 Couleur Noir |  |
|  | |  1000 pz 1000 pcs 1000 pces | |  a richiesta si possono fornire montate they can be provided mounted on fuses upon request sur demande on peut les fournir assemblés |

| | | | | |
|--|--|--|---|---|
| C7852  | Porta-microfusibile Corrente 6,3 A Tensione 250 V Passo 5,08 mm Contatti Rame stagnato Corpo Termoplastica UL94-V0 Colore Nero | Holder for microfuse Current 6,3 A Voltage 250 V Pin distance 5,08 mm Contacts Tinned copper Body Thermoplastic UL94-V0 Colour Black | Porte micro fusibile Courant 6,3 A Tension 250 V Pas 5,08 mm Contacts Cuivre étamé Corps Thermoplastique UL94-V0 Couleur Noir |  |
|  | |  1000 pz 1000 pcs 1000 pces | |  a richiesta si possono fornire montate they can be provided mounted on fuses upon request sur demande on peut les fournir assemblés |