

# FLUOSPOT



Colors:  
85
80


- Indoor and outdoor fluorecent lamp floodlight, comprising:
- Technopolymer housing
  - Clear UV-stabilised and impact resistant technopolymer cover
  - Polished aluminium reflector
  - Silicone gasket
  - Polyamide electrical connection box with supporting and directional functions
  - Stainless steel external screws
  - Painted sheet steel bracket for wall-mounting supplied with polyamide cover
  - Intended goniometer to ensure a precise aiming



FLUOSPOT  
S/EW  
1x24 W

FLUOSPOT  
S/EW  
2x9 W


FLUOSPOT  
S/EW  
4x9 W

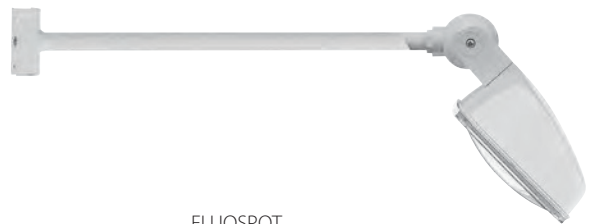

FLUOSPOT  
KIT S/EW

### Lamps


	2G10	1x24 W
	2G10	1x24 W
	2G7	2x9 W
	2G7	4x9 W
	G23	2x9 W
	G23	4x9 W
	G23	4x9 W

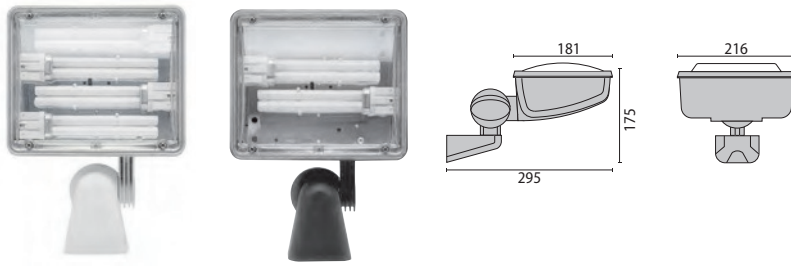

## FLUOSPOT KIT S/EW

IK09 12J xx7

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Fluorescent - electronic ballast 220/240 V 50/60 Hz</b>																			
G23	4x9 W	FSD	TC-S	80	I		4000	•	A2	S/EW	-	-	-	-	-	-	<b>03006080</b>	<sup>1</sup>	
G23	4x9 W	FSD	TC-S	85	I		4000	•	A2	S/EW	-	-	-	-	-	-	<b>03006185</b>	<sup>1</sup>	
<b>Fluorescent - magnetic ballast 230 V 50 Hz</b>																			
G23	4x9 W	FSD	TC-S	80	I		4000	•	B2	S/EW	-	-	-	-	-	-	<b>03002280</b>	<sup>1</sup>	
G23	4x9 W	FSD	TC-S	85	I		4000	•	B2	S/EW	-	-	-	-	-	-	<b>03002385</b>	<sup>1</sup>	

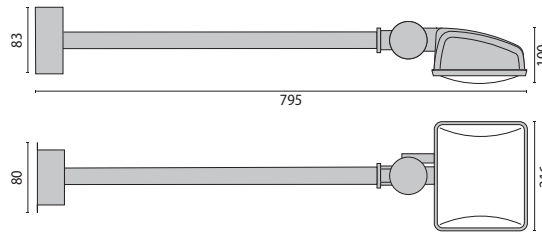

## FLUOSPOT S/EW

IK09 12J xx7


LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
<b>Fluorescent - electronic ballast 220/240 V 50/60 Hz</b>																			
2G10	1x24 W	FSS	TC-FEL	80	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05357980</b>		
2G10	1x24 W	FSS	TC-FEL	85	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05358085</b>		
2G7	2x9 W	FSD	TC-SEL	80	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05357580</b>		
2G7	2x9 W	FSD	TC-SEL	85	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05357685</b>		
2G7	4x9 W	FSD	TC-SEL	80	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05357780</b>		
2G7	4x9 W	FSD	TC-SEL	80	I		4000	•	A2	S/EW	-	-	-	-	-	-	<b>07040080</b>		
2G7	4x9 W	FSD	TC-SEL	85	I		-	•	A2	S/EW	-	-	-	-	-	-	<b>05357885</b>		
2G7	4x9 W	FSD	TC-SEL	85	I		4000	•	A2	S/EW	-	-	-	-	-	-	<b>07040185</b>		
<b>Fluorescent - magnetic ballast 230 V 50 Hz</b>																			
2G10	1x24 W	FSS	TC-FEL	80	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05893013</b>		
2G10	1x24 W	FSS	TC-FEL	85	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05903023</b>		
G23	2x9 W	FSD	TC-S	80	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05836013</b>		
G23	2x9 W	FSD	TC-S	85	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05901023</b>		
G23	4x9 W	FSD	TC-S	80	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05835013</b>		
G23	4x9 W	FSD	TC-S	80	I		4000	•	B2	S/EW	-	-	-	-	-	-	<b>07199013</b>		
G23	4x9 W	FSD	TC-S	85	I		-	•	B2	S/EW	-	-	-	-	-	-	<b>05900023</b>		
G23	4x9 W	FSD	TC-S	85	I		4000	•	B2	S/EW	-	-	-	-	-	-	<b>07204023</b>		

1) Complete with 500 mm bracket


K) When Kelvin degree information is provided, the fixture is complete with lamp.

## OPTIONAL ACCESSORIES


DESCRIPTION	COLOUR	PART NUMBER	EURO
<b>FLUOSPOT</b>			
A113/500 500mm steel extension arm bracket finished black.	80	<b>14004011</b>	
A113/500 500mm steel extension arm bracket finished white.	85	<b>14005021</b>	
A113/1000 Extension arm available 1000mm length finished black.	80	<b>14323013</b>	
A113/1000 Extension arm available 1000mm length finished white.	85	<b>14324023</b>	
A0168/500 Die-cast IP 54 aluminium connection box complete with 500mm steel arm, black painted. Suitable for through-wiring.	80	<b>14002680</b>	
A0168/500 Die-cast IP 54 aluminium connection box complete with 500mm steel arm, white painted. Suitable for through-wiring.	85	<b>14002785</b>	
A0168/1000 Die cast aluminium connection box (IP54) and 100cm arm in steel painted in black. It allows connection of fittings in series.	80	<b>14002880</b>	
A0168/1000 Die-cast IP 54 aluminium connection box complete with 1000mm steel arm, white painted. Suitable for through-wiring.	85	<b>14002985</b>	
A107 Adjustable steel telescopic tri-pod stand with polyamide joints.	80	<b>14337011</b>	



A113




A0168







A107

### FLUOSPOT


 **max 1,7 kg**

 **0,04 m<sup>2</sup>**



### FLUOSPOT KIT

 **max 2,5 kg**

 **0,05 m<sup>2</sup>**

