


GUELL 3

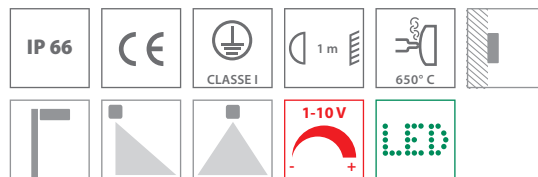

Colors:

94

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminium housing chemically pre-treated and painted with polyester powder coating
- Flat extra clear tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-aging silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- 3000 K and 5000 K available on request
- Dimmable ballast on request



GUELL 3
A/W - 4 LED



GUELL 3
A/W - 6 LED



GUELL 3
A/W - 8 LED



GUELL 3
S/W - 4 LED




GUELL 3
S/W - 6 LED



GUELL 3
S/W - 8 LED

Lamps

	LED	n. 4 LED - 166 W
	LED	n. 6 LED - 212 W
	LED	n. 6 LED - 238 W
	LED	n. 6 LED - 252 W
	LED	n. 8 LED - 293 W
	LED	n. 8 LED - 317 W

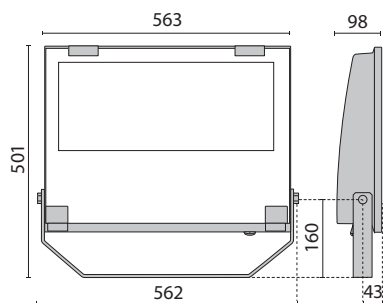

GUELL 3 A/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 6 LED	212 W	-	-	94	I		4000	•	-	A40/W	-	23400 lm	16720 lm	130000 h	L70	-	06121494		
n. 8 LED	293 W	-	-	94	I		4000	•	-	A40/W	-	31200 lm	21521 lm	130000 h	L70	-	06118994		
Power LED dimmable 1-10 V 220/240 V 50/60 Hz																			
n. 4 LED	166 W	-	-	94	I		4000	•	-	A40/W	-	16692 lm	12414 lm	130000 h	L70	-	06116994		
n. 6 LED	238 W	-	-	94	I		4000	•	-	A40/W	-	31710 lm	23778 lm	130000 h	L70	-	06172294		
n. 6 LED	252 W	-	-	94	I		4000	•	-	A40/W	-	25038 lm	18490 lm	130000 h	L70	-	06116594		
n. 8 LED	317 W	-	-	94	I		4000	•	-	A40/W	-	42280 lm	31793 lm	130000 h	L70	-	06171094		

GUELL 3 S/W

IK07 3J xx5

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 6 LED	212 W	-	-	94	I		4000	•	-	S/W	-	23400 lm	17311 lm	130000 h	L70	-	06121294		
n. 8 LED	293 W	-	-	94	I		4000	•	-	S/W	-	31200 lm	23240 lm	130000 h	L70	-	06118794		
Power LED dimmable 1-10 V 220/240 V 50/60 Hz																			
n. 4 LED	166 W	-	-	94	I		4000	•	-	S/W	-	16692 lm	12991 lm	130000 h	L70	-	06116794		
n. 6 LED	238 W	-	-	94	I		4000	•	-	S/W	-	31710 lm	25296 lm	130000 h	L70	-	06172894		
n. 6 LED	252 W	-	-	94	I		4000	•	-	S/W	-	25038 lm	19513 lm	130000 h	L70	-	06116394		
n. 8 LED	317 W	-	-	94	I		4000	•	-	S/W	-	42280 lm	33822 lm	130000 h	L70	-	06171694		

OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
GUELL 3			
A0674/A Louvre GUELL 3 Asymmetrical	-	14454520	
A0673/S Louvre GUELL 3 Symmetrical	-	14454220	
A0666 Cover GUELL 3	94	14452894	
A0667 Frosted glass GUELL 3	94	14452994	
A0665 Protective grid GUELL 3	-	14452702	
A0672/1000 Wall mount support 1000 mm GUELL 3	94	14453994	
A0671/1 Single pole top support GUELL 3 for poles \varnothing 60-76 mm	94	14453794	
A0671/2 Double pole top support GUELL 3 for poles \varnothing 60-76 mm	94	14453894	
A0688 GUELL 3 strengthening bracket.	04	14461104	

