


JOLLY 1 A25/W

IK07 3J xx5


LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ ≥ 0.9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	A25/W	-	-	-	-	-	-	-	05208894		
RX7S	1x70 W	MD	HIT-DE	94	I	-	4200	-	-	A25/W	-	-	-	-	-	-	-	07022994		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	A25/W	-	-	-	-	-	-	-	05208994		
RX7S	1x150 W	MD	HIT-DE	94	I	-	4200	-	-	A25/W	-	-	-	-	-	-	-	07022894		



JOLLY 1 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ ≥ 0.9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	S/W	-	-	-	-	-	-	-	05208694		
RX7S	1x70 W	MD	HIT-DE	94	I	-	4200	-	-	S/W	-	-	-	-	-	-	-	07023194		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	S/W	-	-	-	-	-	-	-	05208794		
RX7S	1x150 W	MD	HIT-DE	94	I	-	4200	-	-	S/W	-	-	-	-	-	-	-	07023094		




JOLLY 1 C/I

IK07 3J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ ≥ 0.9	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	C/I	-	-	-	-	-	-	-	05226794		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	C/I	-	-	-	-	-	-	-	05226894		

K) When Kelvin degree information is provided, the fixture is complete with lamp.

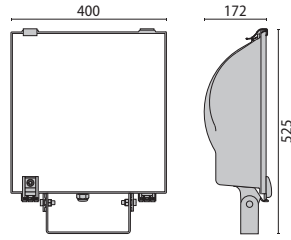


JOLLY 2 A35/I

IK08 6J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	05188294		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	05188494		
E40	1x250 W	ST	HST	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	07043994		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	05188694		
E40	1x400 W	ST	HST	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	07044994		

Discharge - magnetic ballast 230 V 50 Hz for HPI-T Plus lamp

E40	1x250 W	MT	HIT-CE	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	05188394		
E40	1x250 W	MT	HIT-CE	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	07020794		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	05188594		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	-	A35/I	-	-	-	-	-	-	-	07020994		

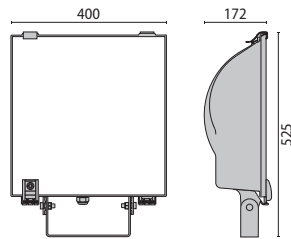

JOLLY 2 S/M


IK08 6J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS ϕ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO	
Discharge - magnetic ballast 230 V 50 Hz																				
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	05187794		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	05187994		
E40	1x250 W	ST	HST	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	07043894		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	05188194		
E40	1x400 W	ST	HST	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	07044894		

Discharge - magnetic ballast 230 V 50 Hz for HPI-T Plus lamp

E40	1x250 W	MT	HIT-CE	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	05187894		
E40	1x250 W	MT	HIT-CE	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	07020394		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	05188094		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	-	S/M	-	-	-	-	-	-	-	07020594		

K) When Kelvin degree information is provided, the fixture is complete with lamp.

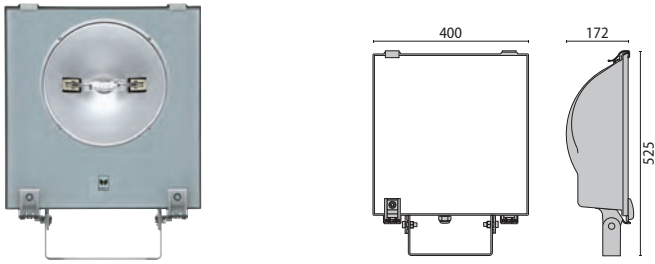


JOLLY 2 C/I


IK08 6J xx5

LAMPHOLDER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0.9	EEI	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Discharge - magnetic ballast 230 V 50 Hz																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	-	-	-	C/I	-	-	-	-	-	-	05225894		
Fc2	1x250 W	SD-MD	HST-DE-HIT-DE	94	I	-	-	-	-	C/I	-	-	-	-	-	-	05225994		

JOLLY 1

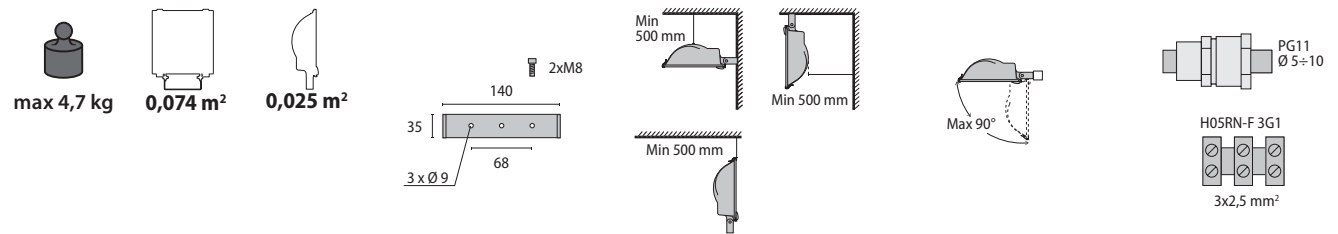

JOLLY 2

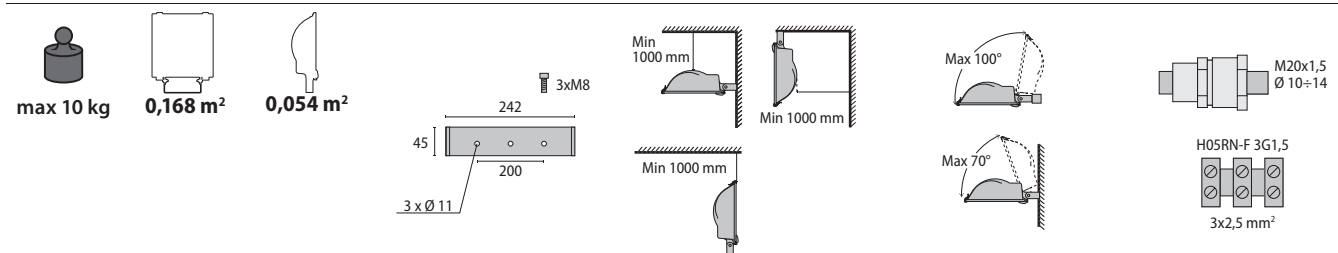

LEO



Colors:

94

Discharge lamp floodlight for indoor and outdoor lighting, comprising:

- Polyester powder-painted die-cast aluminium housing
- Flat tempered glass diffuser
- Extra pure polished aluminium reflectors
- Gaskets made of silicone foam directly applied on glass without joints
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket



LEO
A/I



LEO
S/M



LEO
C/I



LEO
WR



Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W
	E40	1x250 W
	E40	1x400 W
	E40	1x400 W
	RX7S	1x150 W