

INSERT+ ZERO



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured




YouTube video



Wall recessed luminaire, for indoor and outdoor comprising:

- Painted die-cast aluminium housing
- Diffuser in flat glass, internally frosted
- Silicone gasket
- Standard power supply already included
- Stainless steel locking screws
- 503 standard recessed box included in the product
- The fitting is suitable for through-wiring

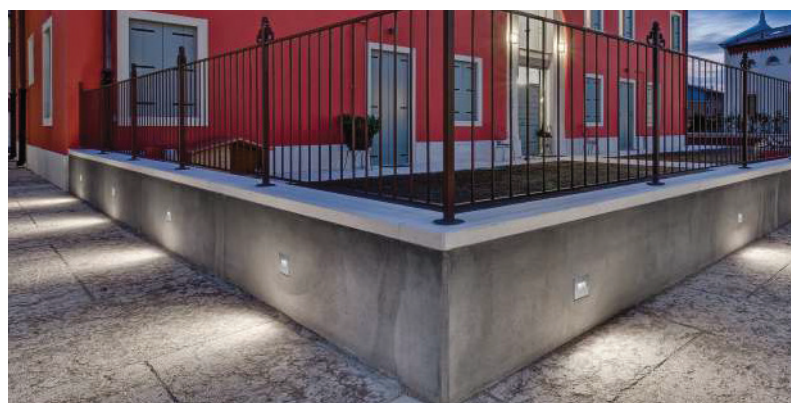

INSERT+ ZERO

IK08 5J xx5

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS Φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
LED	5 W	I	80	4000	•	A29/M	-	530 lm	142 lm	90	10	36000 h	●	304111
LED	5 W	I	80	3000	•	A29/M	-	511 lm	125 lm	90	10	36000 h	●	304110
LED	5 W	I	80	4000	•	A29/M	-	530 lm	142 lm	90	10	36000 h	●	304113
LED	5 W	I	80	3000	•	A29/M	-	511 lm	125 lm	90	10	36000 h	●	304112
LED	5 W	I	80	4000	•	A29/M	-	530 lm	142 lm	90	10	36000 h	○	304109
LED	5 W	I	80	3000	•	A29/M	-	511 lm	125 lm	90	10	36000 h	○	304108

