

# MIMIK 20




Range of indoor and outdoor wall mounted LED fixtures, comprising:

- Polyester powder coated die-cast aluminium housing
- Powder polyester painting process optimized against UV rays in 13 different steps
- Silicone gasket
- LED versions include 220/240 V 50/60 Hz safety transformer
- Flat, microprismatic tempered glass diffuser, screen

- printed on the inner surface for MIMIK FLAT series
- Available in single (M) and dual (B) emission versions
- Flat, transparent, tempered glass diffuser, screen printed on the inner surface for MIMIK series
- "MIMIK fixtures are equipped with high-transmittance polycarbonate lenses with different light distributions to meet the most diverse lighting requirements



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

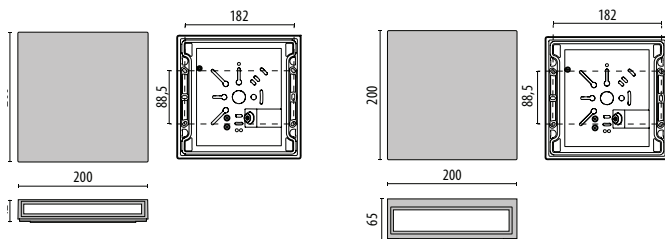

MIMIK 20  
FLAT

MIMIK 20




Please visit our web site  
[www.performanceinlighting.com](http://www.performanceinlighting.com)  
for the latest updated versions available.

GENERAL OUTDOOR

## MIMIK 20 FLAT M

IK06 1J xx3


WATTAGE	CLASS	CE	CRI	KELVIN	COS φ >=0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
13,5 W	I	✓	80	4000	✓	A/W	-	1710 lm	1042 lm	80	10	60000 h	●	<b>303744</b>
13,5 W	I	✓	80	3000	✓	A/W	-	1653 lm	960 lm	80	10	60000 h	●	<b>303746</b>
13,5 W	I	✓	80	4000	✓	A/W	-	1710 lm	1042 lm	80	10	60000 h	●	<b>303745</b>
13,5 W	I	✓	80	3000	✓	A/W	-	1653 lm	960 lm	80	10	60000 h	●	<b>303747</b>
13,5 W	I	✓	80	4000	✓	A/W	-	1710 lm	1042 lm	80	10	60000 h	○	<b>303795</b>
13,5 W	I	✓	80	3000	✓	A/W	-	1653 lm	960 lm	80	10	60000 h	○	<b>303842</b>

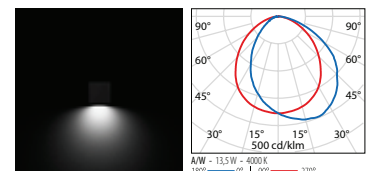

## MIMIK 20 FLAT M EM1P

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED - Emergency 220-240 V 50/60 Hz</b>														
16,5 W	I	-	80	4000	✓	A/W	-	1710 lm	1041 lm	80	10	60000 h	●	<b>304201</b>
16,5 W	I	-	80	3000	✓	A/W	-	1653 lm	958 lm	80	10	60000 h	●	<b>304198</b>
16,5 W	I	-	80	4000	✓	A/W	-	1710 lm	1041 lm	80	10	60000 h	●	<b>304202</b>
16,5 W	I	-	80	3000	✓	A/W	-	1653 lm	958 lm	80	10	60000 h	●	<b>304199</b>
16,5 W	I	-	80	4000	✓	A/W	-	1710 lm	1041 lm	80	10	60000 h	○	<b>304203</b>
16,5 W	I	-	80	3000	✓	A/W	-	1653 lm	958 lm	80	10	60000 h	○	<b>304200</b>

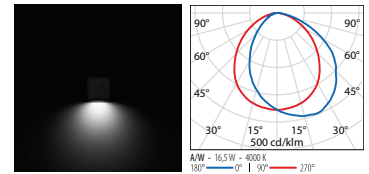

## MIMIK 20 FLAT B

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
24 W	I	✓	80	4000	✓	A/W	-	3420 lm	2095 lm	80	10	60000 h	●	<b>303748</b>
24 W	I	✓	80	3000	✓	A/W	-	3306 lm	1930 lm	80	10	60000 h	●	<b>303750</b>
24 W	I	✓	80	4000	✓	A/W	-	3420 lm	2095 lm	80	10	60000 h	●	<b>303749</b>
24 W	I	✓	80	3000	✓	A/W	-	3306 lm	1930 lm	80	10	60000 h	●	<b>303751</b>
24 W	I	✓	80	4000	✓	A/W	-	3420 lm	2095 lm	80	10	60000 h	○	<b>303797</b>
24 W	I	✓	80	3000	✓	A/W	-	3306 lm	1930 lm	80	10	60000 h	○	<b>303794</b>

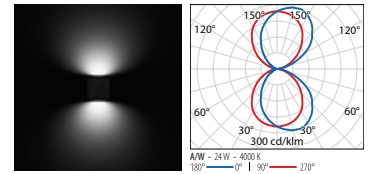

## MIMIK 20 CP/T2

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
26 W	I	✓	70	4000	✓	CP/T2	-	3360 lm	2292 lm	80	10	60000 h	●	<b>303752</b>
26 W	I	✓	70	3000	✓	CP/T2	-	3120 lm	2256 lm	80	10	60000 h	●	<b>303754</b>
26 W	I	✓	70	4000	✓	CP/T2	-	3360 lm	2292 lm	80	10	60000 h	●	<b>303753</b>
26 W	I	✓	70	3000	✓	CP/T2	-	3120 lm	2256 lm	80	10	60000 h	●	<b>303755</b>
26 W	I	✓	70	4000	✓	CP/T2	-	3360 lm	2292 lm	80	10	60000 h	○	<b>303841</b>
26 W	I	✓	70	3000	✓	CP/T2	-	3120 lm	2256 lm	80	10	60000 h	○	<b>303840</b>
21 W	I	✓	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	○	<b>304419</b>
21 W	I	✓	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	●	<b>304416</b>
21 W	I	✓	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	●	<b>304420</b>
21 W	I	✓	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	●	<b>304417</b>
21 W	I	✓	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	○	<b>304421</b>
21 W	I	✓	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	○	<b>304418</b>

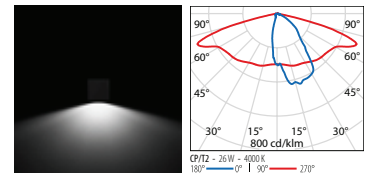

## MIMIK 20 CP/T2 EM3P

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED - Emergency 220-240 V 50/60 Hz</b>														
24 W	I	-	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	●	<b>304395</b>
24 W	I	-	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	●	<b>304394</b>
24 W	I	-	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	●	<b>304397</b>
24 W	I	-	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	●	<b>304396</b>
24 W	I	-	70	4000	✓	CP/T2	-	2453 lm	1928 lm	80	10	60000 h	○	<b>304399</b>
24 W	I	-	70	3000	✓	CP/T2	-	2278 lm	1897 lm	80	10	60000 h	○	<b>304398</b>

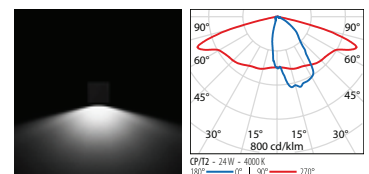

## MIMIK 20 CP/T3

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>														
26 W	I	✓	70	4000	✓	CP/T3	-	3360 lm	2309 lm	80	10	60000 h	●	<b>303756</b>
26 W	I	✓	70	3000	✓	CP/T3	-	3120 lm	2273 lm	80	10	60000 h	●	<b>303758</b>
26 W	I	✓	70	4000	✓	CP/T3	-	3360 lm	2309 lm	80	10	60000 h	●	<b>303757</b>
26 W	I	✓	70	3000	✓	CP/T3	-	3120 lm	2273 lm	80	10	60000 h	●	<b>303759</b>
26 W	I	✓	70	4000	✓	CP/T3	-	3360 lm	2309 lm	80	10	60000 h	○	<b>303733</b>
26 W	I	✓	70	3000	✓	CP/T3	-	3120 lm	2273 lm	80	10	60000 h	○	<b>303734</b>
21 W	I	✓	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	●	<b>304425</b>
21 W	I	✓	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	●	<b>304422</b>
21 W	I	✓	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	●	<b>304426</b>
21 W	I	✓	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	●	<b>304423</b>
21 W	I	✓	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	○	<b>304427</b>
21 W	I	✓	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	○	<b>304424</b>

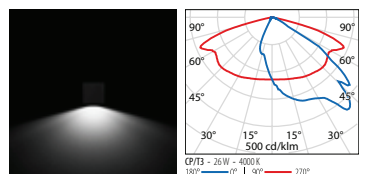

## MIMIK 20 CP/T3 EM3P

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
24 W	I	-	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	●	<b>304401</b>
24 W	I	-	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	●	<b>304400</b>
24 W	I	-	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	●	<b>304403</b>
24 W	I	-	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	●	<b>304402</b>
24 W	I	-	70	4000	✓	CP/T3	-	2453 lm	1935 lm	80	10	60000 h	○	<b>304405</b>
24 W	I	-	70	3000	✓	CP/T3	-	2278 lm	1912 lm	80	10	60000 h	○	<b>304404</b>

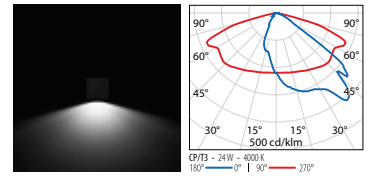

## MIMIK 20 A60/W

IK06 1J xx3


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
26 W	I	✓	70	4000	✓	A60/W	-	3360 lm	2183 lm	80	10	60000 h	●	<b>303760</b>
26 W	I	✓	70	3000	✓	A60/W	-	3120 lm	2149 lm	80	10	60000 h	●	<b>303762</b>
26 W	I	✓	70	4000	✓	A60/W	-	3360 lm	2183 lm	80	10	60000 h	●	<b>303761</b>
26 W	I	✓	70	3000	✓	A60/W	-	3120 lm	2149 lm	80	10	60000 h	●	<b>303763</b>
26 W	I	✓	70	4000	✓	A60/W	-	3360 lm	2183 lm	80	10	60000 h	○	<b>303735</b>
26 W	I	✓	70	3000	✓	A60/W	-	3120 lm	2149 lm	80	10	60000 h	○	<b>303736</b>
21 W	I	✓	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	●	<b>304431</b>
21 W	I	✓	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	●	<b>304428</b>
21 W	I	✓	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	●	<b>304432</b>
21 W	I	✓	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	●	<b>304429</b>
21 W	I	✓	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	○	<b>304433</b>
21 W	I	✓	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	○	<b>304430</b>

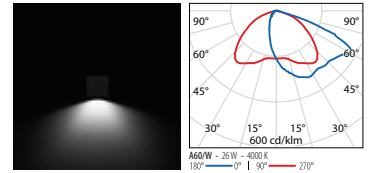

## MIMIK 20 A60/W EM3P

IK06 1J xx3

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
24 W	I	-	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	●	<b>304407</b>
24 W	I	-	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	●	<b>304406</b>
24 W	I	-	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	●	<b>304409</b>
24 W	I	-	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	●	<b>304408</b>
24 W	I	-	70	4000	✓	A60/W	-	2453 lm	1836 lm	80	10	60000 h	○	<b>304411</b>
24 W	I	-	70	3000	✓	A60/W	-	2278 lm	1807 lm	80	10	60000 h	○	<b>304410</b>

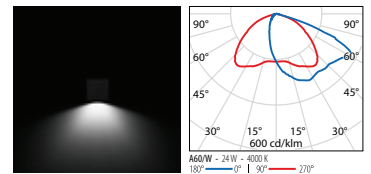


## OPTIONAL ACCESSORIES


### Complete unit

1A+1B = please order 2 codes

	COMPONENTS
<b>A</b>	luminaire
<b>B</b>	customising ring



DESCRIPTION	COLOR	PART NUMBER
<b>MIMIK FLAT M</b>		
FLAT M Customising ring / Facade Accessory	●	<b>310440</b>
FLAT M Customising ring / Facade Accessory	●	<b>310441</b>
FLAT M Customising ring / Facade Accessory	○	<b>310450</b>
<b>MIMIK FLAT B</b>		
FLAT B Customising ring / Facade Accessory	●	<b>310442</b>
FLAT B Customising ring / Facade Accessory	●	<b>310443</b>
FLAT B Customising ring / Facade Accessory	○	<b>310451</b>
<b>MIMIK CP/T2 - CP/T3 - A60/W</b>		
Customising ring / Facade Accessory	●	<b>310444</b>
Customising ring / Facade Accessory	●	<b>310445</b>
Customising ring / Facade Accessory	○	<b>310449</b>

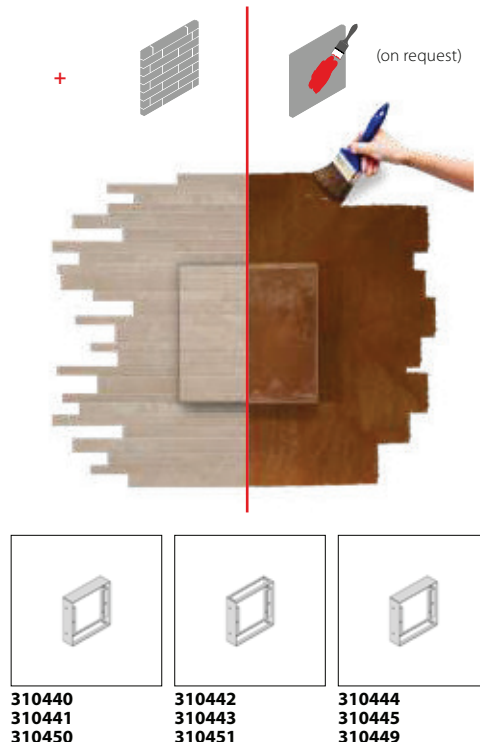

**310440**  
**310441**  
**310450**

**310442**  
**310443**  
**310451**

**310444**  
**310445**  
**310449**