


MULTI+ 40 PC




Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:

- Technopolymer housing
- Opal diffuser manufactured from technopolymer, 960°C glow wire test rated
- Silicone gasket
- Stainless steel, anti-tamper locking screws
- Through-wiring possible
- Class II
- Analogue dimmable HF ballast, 1-10 V
- Dimmable DALI
- EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting
- Max 20 mm diameter for cable/conduit entry
- Hyper-frequency (HF) sensor operating at a frequency


- of 5.8 Ghz+/- 75 Mhz
- SMART versions are equipped with customised electronic devices that allows energy savings reducing the luminous flux, whilst providing a 30% working flux for safety lighting and reaching 100% flux when necessary
- SMART HF versions are complete with integrated High Frequency sensor that operates from 30% up to 100% of the flux when it detects the presence of people
- SMART DA versions are suitable for use in systems with two separate lines where the demand for 100% of the flux is managed by a push button or line sensor
- Supplied with SMD self-heat dissipating power LED metal core board: FUTURE-PROOF™

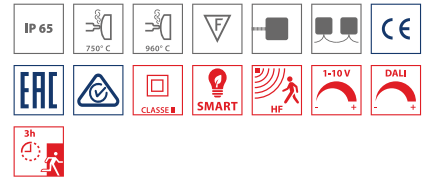

○ WH-87 / White / Textured




Please visit our web site www.performanceinlighting.com for the latest updated versions available.

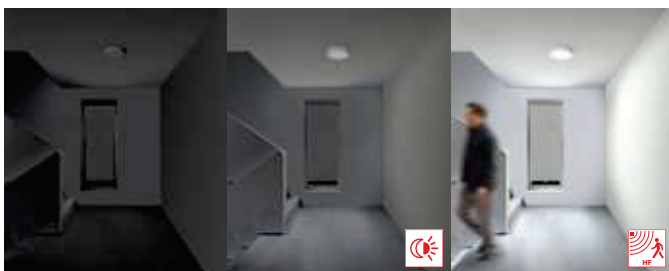

OFF
0%

ON - SMART HF
30%

ON - SMART HF
100%

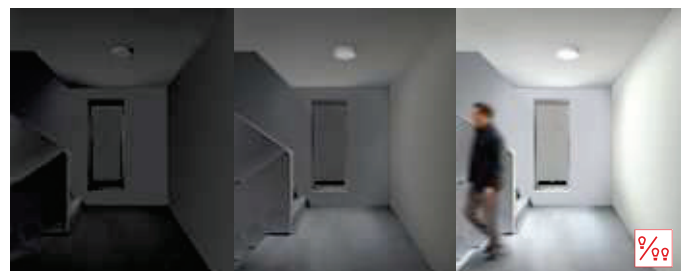

OFF
0%


ON - SMART DA
30%

ON - SMART DA
100%

MULTI+ 40 PC

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304127
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304126
19.5 W	II	-	80	4000	✓	S/EW	-	3121 lm	1502 lm	80	10	60000 h	○	304141
19.5 W	II	-	80	3000	✓	S/EW	-	3017 lm	1464 lm	80	10	60000 h	○	304140
Fluorescent - electronic ballast 220-240 V 50/60 Hz														
2x26 W	II	-	-	-	✓	S/EW	-	-	-	-	-	-	○	304142
Power LED - dimmable DALI 220-240 V 50/60 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304131
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304130
Power LED dimmable 1-10 V 220-240 V 50/60 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304129
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304128



MULTI+ 40 PC SMART HF

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 230 V 50 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304211
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304210



MULTI+ 40 PC HF

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 230 V 50 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304135
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304134



MULTI+ 40 PC SMART DA

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz														
28 W	II	-	80	4000	✓	S/EW	-	4284 lm	2278 lm	80	10	60000 h	○	304209
28 W	II	-	80	3000	✓	S/EW	-	4141 lm	2146 lm	80	10	60000 h	○	304208



MULTI+ 40 PC EM/3P

IK10 20J xx9

WATTAGE	CLASS	CEC	CRI	KELVIN	COS θ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - Emergency 220-240 V 50/60 Hz														
19.5 W	II	-	80	4000	✓	S/EW	-	3121 lm	1502 lm	80	10	60000 h	○	304139
19.5 W	II	-	80	3000	✓	S/EW	-	3017 lm	1464 lm	80	10	60000 h	○	304138



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
MULTI+ 40 PC		
Tool TORX		310514



310514

GENERAL OUTDOOR