

QUASAR 30

design by R. FIORATO - F. PAGLIARINI




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured



YouTube video

Range of indoor and outdoor wall mounted LED fixtures, comprising:

- Die-cast painted aluminium housing
- Glass diffuser, internally painted for homogeneous diffused light
- Flat microprismatic glass diffuser internally pattern for TECH versions
- Reflector in satin finish pure aluminium (Al 99.98)
- Silicone gasket
- High frequency electronic ballast supplied as standard
- EM/3P version is designed for multipurpose and 3 hours sustained emergency lighting
- EM/3P LED versions feature an additional LED that is used for emergency lighting
- Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- 3 hours
- Versions with dimmable 1-10V or DALI drivers are available

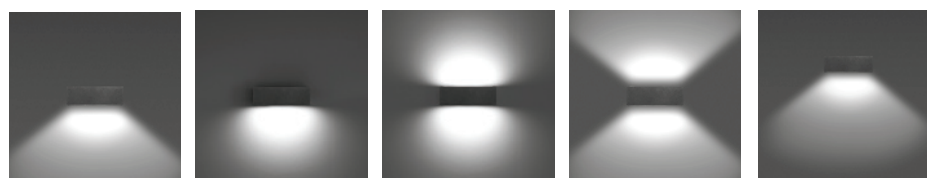


QUASAR 30
TECH

QUASAR 30
M

QUASAR 30
B

QUASAR 30
DOUBLE TECH

QUASAR 30
TECH EM/3P




Package size



11 x 32 x 11,5 cm
(master x 1)


Fixing holes



QUASAR 30 TECH

IK07 2J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	23 W	-		80	4000	•	A30/M	30°	2384 lm	1505 lm	80	10	50000 h	●	303553
LED	23 W	-		80	3000	•	A30/M	30°	2276 lm	1350 lm	80	10	50000 h	●	303554
LED	23 W	-		80	4000	•	A30/M	30°	2384 lm	1505 lm	80	10	50000 h	●	303551
LED	23 W	-		80	3000	•	A30/M	30°	2276 lm	1350 lm	80	10	50000 h	●	303552
LED	23 W	-		80	4000	•	A30/M	30°	2384 lm	1505 lm	80	10	50000 h	○	303549
LED	23 W	-		80	3000	•	A30/M	30°	2276 lm	1350 lm	80	10	50000 h	○	303550



QUASAR 30 DOUBLE TECH

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	32 W	-		80	4000	•	A30/M	-	3920 lm	2251 lm	80	10	50000 h	●	304106
LED	32 W	-		80	3000	•	A30/M	-	3744 lm	2046 lm	80	10	50000 h	●	304103
LED	32 W	-		80	4000	•	A30/M	-	3920 lm	2251 lm	80	10	50000 h	●	304107
LED	32 W	-		80	3000	•	A30/M	-	3744 lm	2046 lm	80	10	50000 h	●	304104
LED	32 W	-		80	4000	•	A30/M	-	3920 lm	2251 lm	80	10	50000 h	○	304105
LED	32 W	-		80	3000	•	A30/M	-	3744 lm	2046 lm	80	10	50000 h	○	304102



QUASAR 30 M

IK06 1J xx3


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	23 W	-		80	4000	•	S/EW	-	2384 lm	681 lm	80	10	50000 h	●	303559
LED	23 W	-		80	3000	•	S/EW	-	2276 lm	623 lm	80	10	50000 h	●	303560
LED	23 W	-		80	4000	•	S/EW	-	2384 lm	681 lm	80	10	50000 h	●	303557
LED	23 W	-		80	3000	•	S/EW	-	2276 lm	623 lm	80	10	50000 h	●	303558
LED	23 W	-		80	4000	•	S/EW	-	2384 lm	681 lm	80	10	50000 h	○	303555
LED	23 W	-		80	3000	•	S/EW	-	2276 lm	623 lm	80	10	50000 h	○	303556



QUASAR 30 B

IK06 1J xx3

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	32 W	-		80	4000	•	S/EW	-	3920 lm	1148 lm	80	10	50000 h	●	303565
LED	32 W	-		80	3000	•	S/EW	-	3744 lm	1044 lm	80	10	50000 h	●	303566
LED	32 W	-		80	4000	•	S/EW	-	3920 lm	1148 lm	80	10	50000 h	●	303563
LED	32 W	-		80	3000	•	S/EW	-	3744 lm	1044 lm	80	10	50000 h	●	303564
LED	32 W	-		80	4000	•	S/EW	-	3920 lm	1148 lm	80	10	50000 h	○	303561
LED	32 W	-		80	3000	•	S/EW	-	3744 lm	1044 lm	80	10	50000 h	○	303562



QUASAR 30 TECH EM/3P

IK07 2J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED- Emergency 220-240 V 50/60 Hz															
LED	23 W+ 1,1 W	-		80	4000	•	A30/M	-	2384 lm	1505 lm	80	10	50000 h	●	304346
LED	23 W+ 1,1 W	-		80	3000	•	A30/M	-	2276 lm	1350 lm	80	10	50000 h	●	304345
LED	23 W+ 1,1 W	-		80	4000	•	A30/M	-	2384 lm	1505 lm	80	10	50000 h	●	304197
LED	23 W+ 1,1 W	-		80	3000	•	A30/M	-	2276 lm	1350 lm	80	10	50000 h	●	304196
LED	23 W+ 1,1 W	-		80	4000	•	A30/M	-	2384 lm	1505 lm	80	10	50000 h	○	304348
LED	23 W+ 1,1 W	-		80	3000	•	A30/M	-	2276 lm	1350 lm	80	10	50000 h	○	304347

